


BEAM CLAMP

BEAM CLAMP

Model: LMBC

Technical Features

- Flexible application due to wide adjustment range
- Gives quick and versatile rigging for hoisting equipment, pulley blocks or loads
- The central threaded spindle allows easy attachment and a safe secure grip.
- Spindle can be secured against loosening.

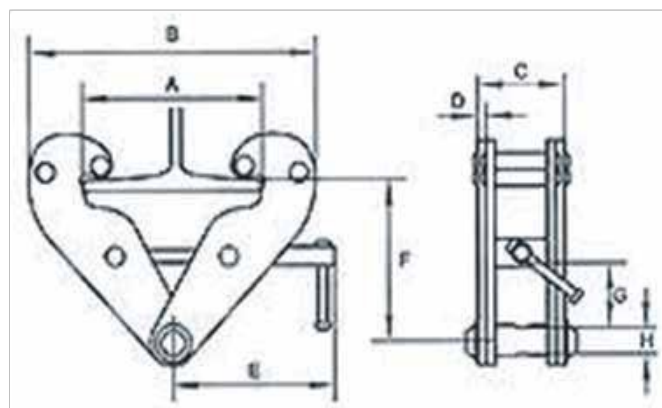

Beam Clamp Specifications

Model No	WLL (Tons)	Jaw Opening (mm)	A		B		C (mm)	D (mm)	E (mm)	F		G		H (mm)
			Min (mm)	Max (mm)	Min (mm)	Max (mm)				Min (mm)	Max (mm)	Min (mm)	Max (mm)	
LMBC01	01	75-220	70	300	165	385	67	4	230	70	160	16	70	22
LMBC02	02	75-220	70	300	165	385	75	6	230	70	160	16	70	22
LMBC03	03	80-320	70	388	230	508	100	8	265	130	230	32	110	25
LMBC05	05	80-320	70	388	230	508	108	10	265	130	230	32	110	25
LMBC10	10	90-320	82	440	270	590	117	12	325	170	275	60	135	35
LMBC20	20	90-320	105	485	385	710	135	16	365	220	330	70	170	54