


CLEVIS GRAB HOOK

Model: LMC8

Technical Features

- Forged or welded super alloy steel
- Fatigue tested at 1.5 times the WLL for 2000 cycles
- Suitable for use with Gr.80 alloy steel chain
- All load pins are 100 Individually inspected and tested
- Meets standard EN 1667
- All clevis self-locking hook are Individually proof tested at 2.5 times working
- Factor of safety is 4:1
- 100% Magnaflux crack detection

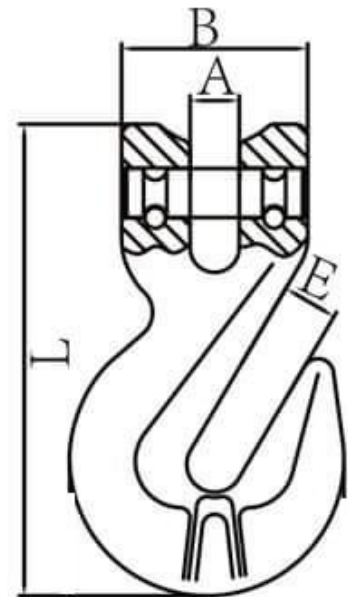

CLEVIS SELF LOCKING HOOK SPECIFICATIONS

Model No	WLL (Tons)	A (mm)	B (mm)	F (mm)	E (mm)	L (mm)	R (mm)	Net Wt (Kg)
LM-CSL(08)	2	9.5	38	40	35	160	120	0.8
LM-CSL(10)	3.15	12	46	52	46	195	140	1.5
LM-CSL(13)	5.3	15	59	62	52	250	180	2.8
LM-CSL(16)	8	18	77	66	64	310	225	5.6
LM-CSL(20)	12.5	24	77	81	85	335	240	7.5
LM-CSL(22)	15	24	97	84	74	390	277	11.5
LM-CSL(26)	21.2	31	113	105	95	450	312	18.5
LM-CSL(32)	31.5	35	150	140	134	590	415	45