


CLEVIS HOOK

CLEVIS SLING HOOK WITH LATCH

Model: LM-CSH

Technical Features

- Forged super alloy steel – Quenched & Tempered
- Fatigue tested at 1.5 times the WLL for 2000 cycles
- Designed to use for Gr.80 alloy steel chain
- Meets standard EN 818-2
- Individually proof tested at 2.5 times working load limit
- Factor of safety is 4:1
- 100% Magnaflux crack detection

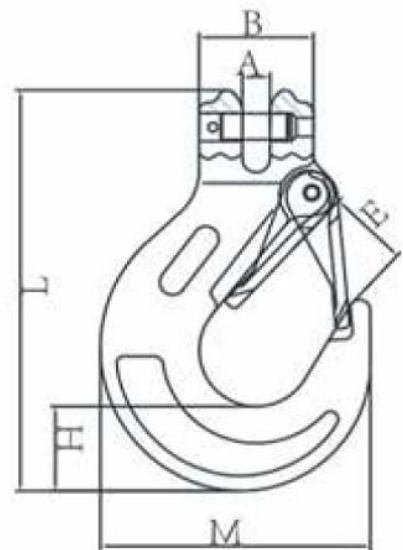

CLEVIS SLING HOOK WITH LATCH SPECIFICATIONS

Model No	WLL (Tons)	A (mm)	B (mm)	H (mm)	E (mm)	L (mm)	Net Wt (Kg)
LM-CSH(08)	2	9.5	37	32	29	118	0.52
LM-CSH(10)	3.15	13	50	35	39	139	1.05
LM-CSH(13)	5.3	16.5	56	43	47	170	2
LM-CSH(16)	8	21.5	70	54	55	204	3.7
LM-CSH(20)	12.5	24	75	58	61	238	6
LM-CSH(22)	15	27	91	62	72	275	10.4
LM-CSH(26)	21.2	30	118	74	85	325	14.5
LM-CSH(32)	31.5	55	149	86	106	405	27