


EYE SLING HOOK WITH LATCH

Model: LM-ESH

Technical Features

- Forged super alloy steel – Quenched & Tempered
- Fatigue tested at 1.5 times the WLL for 2000 cycles
- Designed to use for Gr.80 alloy steel chain
- Meets standard EN 818-2
- Individually proof tested at 2.5 times working load limit
- Factor of safety is 4:1
- 100% Magnaflux crack detection

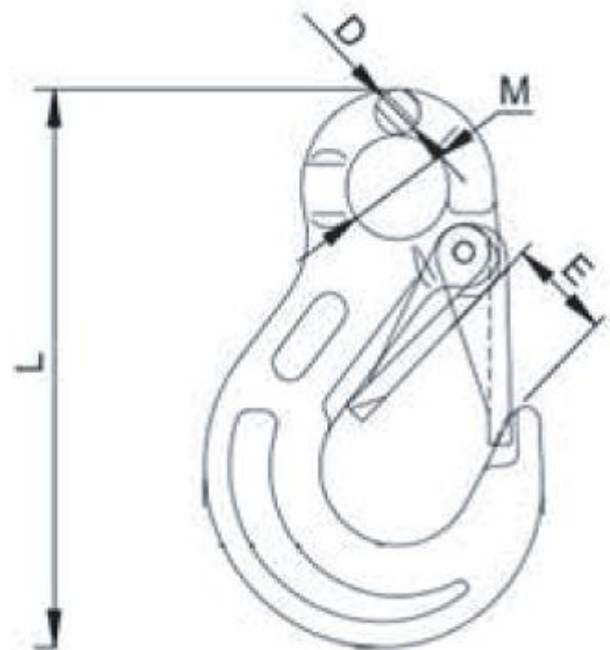

CLEVIS SLING HOOK WITH LATCH SPECIFICATIONS

Model No	WLL (Tons)	M (mm)	D (mm)	E (mm)	L (mm)	(Kg)
LM-ESH(08)	2	25	11	30	132	0.55
LM-ESH(10)	3.15	38	16	33	165	1.05
LM-ESH(13)	5.3	42	19	40	210	1.75
LM-ESH(16)	8	49	22	43	254	3.2
LM-ESH(20)	12.5	61	26	39	304	5.3
LM-ESH(22)	15	61	31	72	347	9.0
LM-ESH(26)	21.2	65	36	81	390	13
LM-ESH(32)	31.5	88	38	102	480	17