


ELECTRIC CHAIN HOIST

with Motorized Trolley-ET

This can be combined with a 4-point or 6-point pushbutton and used as a motorized trolley or overhead traveling crane.

■ Dimensions

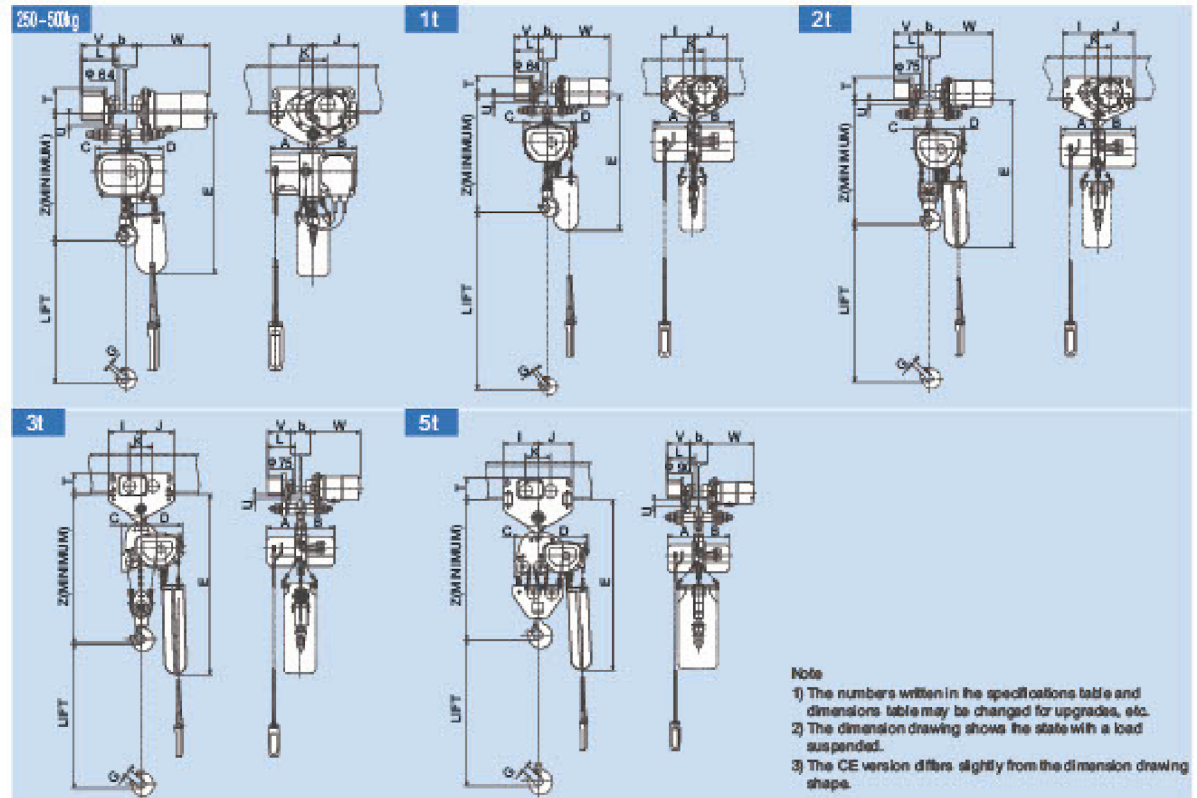

■ Specifications table

Chain Hoist Model Name		1/4S(H) ₂	1/4SN(H) ₂	1/2S(H) ₂	1/2SN(H) ₂	1S(H)	1SN(H)	2S(H)	2SN(H)	3S(H)	5S(H)
Trolley Type		1ET						2ET		3ET	5ET
Rated Load (kg)		250		500		1,000		2,000		3,000	5,000
Dimensions (mm)	Z	523	523	523	523	600	600	700	700	865	984
	A	181	183	181	183	216	216	216	216	216	216
	B	184	210	184	210	216	246	216	246	216	216
	C	125	125	125	125	135	135	90	90	125	175
	D	165	185	165	185	170	170	215	215	270	340
	D(CB)	200	200	200	200	170	170	215	215	270	340
	E	693	693	693	693	750	750	770(840)		910(1,125)	1,170(1,200)
	G	19	19	19	19	23	23	26	26	42	48
	I	185						210		210	240
	J	190						210		210	240
	K	120						148		148	173
	L	182						200		203	219
	T	110						140		140	156
	U	38						18		16	34
	V	159						172		175	181
	W	303						313		316	323
Min. Curve Radius (m)		1.5						1.8		2.0	3.0
Applicable Beam Width b (mm)		75-125						100-150		125-175	
Approx. Weight (kg)		68(69)	71(74)	69(72)	74(77)	75(80)	80(85)	101(111)	108(116)	121(132)	174(191)

All dimensions and specifications are subject to change without notice.

■ Motorized trolley specifications table

Series Name		ET series				ST series		
Model Name		1ET	2ET	3ET	5ET	1ST	2ST	3ST
Working Load Limit (kg)		1,000	2,000	3,000	5,000	1,000	2,000	3,000
Traveling Speed (m/min)	50Hz	10.5(21)				10.5		
	60Hz	12.5(25)				12.5		
Motor Output (kW)	50Hz	0.14(0.27)		0.3(0.6)		0.07	0.14	0.2
	60Hz	0.16(0.32)		0.35(0.7)		0.08	0.16	0.24
Applicable Beam Width b (mm)		75-125	100-150		125-175	75-125	100-150	
Rating		25%ED				25%ED		