


with Motorized Trolley-ST

This can be combined with a 4-point or 6-point pushbutton and used as a motorized trolley or overhead traveling crane.

Dimensions

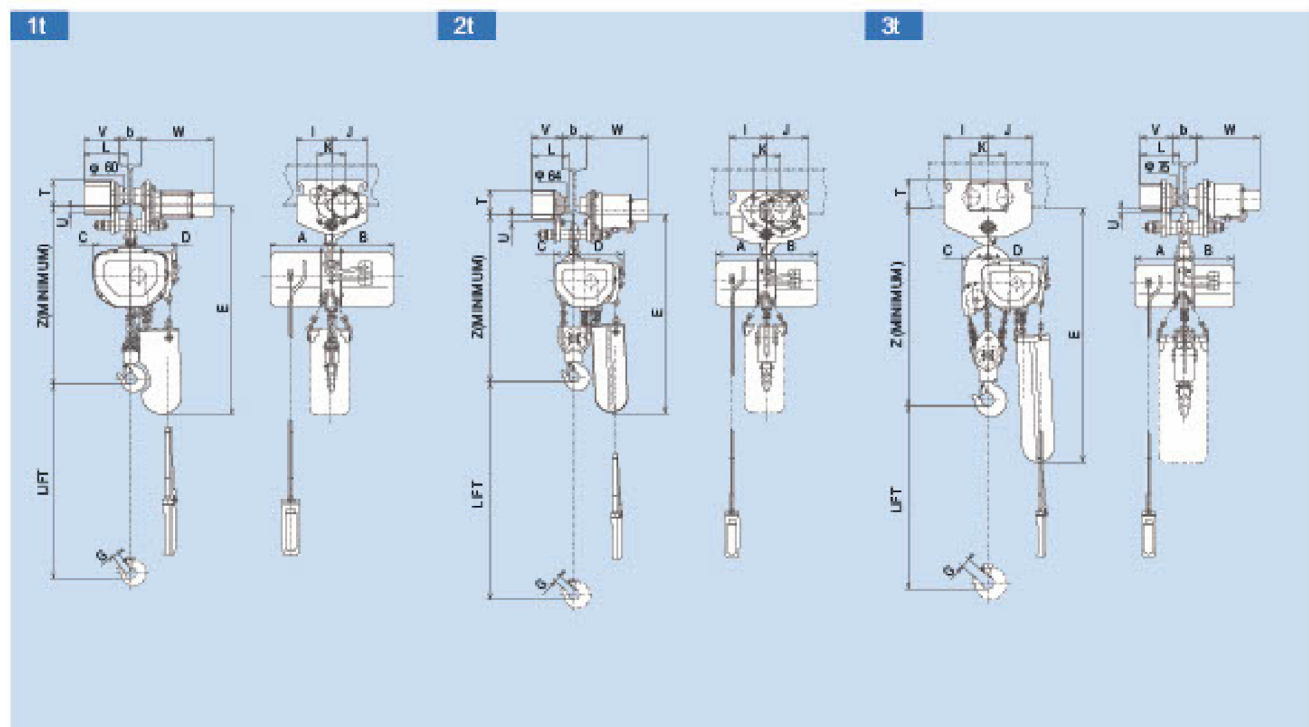

Specifications table

Chain Hoist Model Name		1S(H)	1SN(H)	2S(H)	2SN(H)	3S(H)
Trolley Type		1ST		2ST		3ST
Rated Load (kg)		1,000		2,000		3,000
Dimensions (mm)	Z	578	578	700	700	852
	A	216	216	216	216	216
	B	216	246	216	246	216
	C	135	135	90	90	125
	D, D(CB)	170	170	215	215	270
	E	730	730	772(842)		900(1,119)
	G	23	23	26	26	42
	I	125		160		192
	J	125		177		192
	K	98		120		148
	L	156		163		180
	T	101		119		140
	U	18		19		5
	V	130		135		145
	W	255		270		280
Min. Curve Radius (m)		1.8		2.5		3.0
Applicable Beam Width b (mm)		75–100		100–150		100–150
Approx. Weight (kg)		60(65)	65(70)	86(96)	91(101)	109(120)

All dimensions and specifications are subject to change without notice.