


MASTER LINK

Model: LMML

Technical Features

- Forged or welded super alloy steel
- Suitable for use with Gr.80 chain
- Meets standard EN 1677
- Used for 1 or 2 legs wire rope/chain slings
- Individually proof tested at 2.5 times of the working load limit
- Factor of safety is 4:1

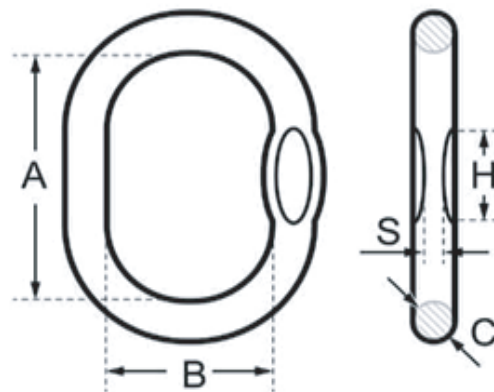

MASTER LINK SPECIFICATIONS

Model No	Weight (kg)	WLL(Ton)	A	B	C	S	H
LMML-13B5	0.3	2.6	95	51	13	7	50
LMML-13B6	0.35	2.4	115	60	13	7	50
LMML-16B6	0.6	3.8	120	70	16	9	70
LMML-16B7	0.86	2.8	190	100	16	9	70
LMML-20B6	1.1	6.4	150	80	20	11	50
LMML-20B7	1.25	5.8	170	90	20	11	70
LMML-22B6	1.53	7.6	170	90	22	12	70
LMML-22B7	1.83	6.4	210	110	22	12	70
LMML-25B6	2.21	10	190	100	25	13	80
LMML-28B6	3.06	12.7	210	110	28	15	80
LMML-28B7	3.81	10.5	270	140	28	15	70
LMML-32B6	5.05	15.2	270	140	32	17	70
LMML-38B6	7.3	25.1	270	140	38	20	55
LMML-38B7	10.78	17	420	220	38	20	55
LMML-45B6	12.2	34	320	170	45	24	60
LMML-45B7	17.06	24.5	470	250	45	24	60
LMML-50B6	17.65	40	380	200	50	-	-
LMML-60B6	28.85	58	430	220	60	-	-
LMML-70B6	45.48	84	500	250	70	-	-