
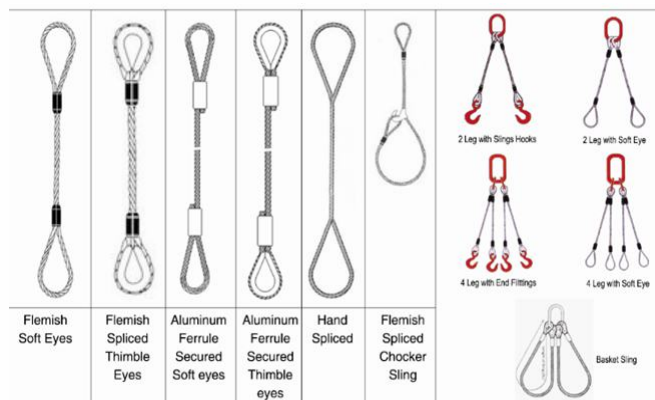



STEEL WIRE ROPE SLINGS

- Types: Soft eyes & Thimble eyes mechanically spliced with aluminium ferrule and Soft eyes & Thimble eyes Flemish spliced with steel ferrules.
- Conform to BS EN 13414-1:2003
- Fully certified and individually stamped for full traceability.



		Single leg sling	Two leg sling		Three and Four leg sling	
Angle to the vertical		0 Deg	0 -45 Deg	45-60 Deg	0-45 Deg	45-60 Deg
						
Nominal Rope Dia (mm)		Working Load Limits(Tonnes)				
8	(5/16")	0.82	1.15	0.82	1.72	1.23
9		1.00	1.40	1.00	2.10	1.50
10	(3/8")	1.30	1.80	1.30	2.73	1.95
11		1.50	2.10	1.50	3.15	2.25
12		1.80	2.50	1.80	3.80	2.70
13	(1/2")	2.10	2.90	2.10	4.40	3.15
14	(9/16")	2.50	3.50	2.50	5.25	3.75
16	(5/8")	3.30	4.60	3.30	6.90	4.95
18		4.10	5.70	4.10	8.60	6.15
19	(3/4")	4.60	6.40	4.60	9.65	6.90
20		5.10	7.10	5.10	10.70	7.65
22	(7/8")	6.20	8.70	6.20	13.00	9.30
24		7.40	10.30	7.40	15.50	11.10
26	(1")	8.60	12.00	8.60	18.05	12.90
28	(1-1/8")	10.00	14.00	10.00	21.00	15.00
32	(1-1/4")	13.10	18.30	13.00	27.50	19.65
36	(1-3/8")	16.60	23.20	16.60	34.85	24.90
38	(1-1/2")	18.50	25.90	18.50	38.85	27.75
40		20.60	28.80	20.60	43.25	30.90
42	(1-5/8")	22.60	31.60	22.60	47.45	33.90
44	(1-3/4")	24.80	34.70	24.80	52.10	37.20
48	(1-7/8")	29.50	41.40	29.50	61.95	44.25
52	(2")	34.80	48.70	34.80	73.10	52.20
56	(2-1/4")	40.20	56.30	40.20	84.40	60.30
60		46.20	64.70	46.20	97.00	69.30
64	(2-1/2")	54.80	76.70	54.80	115.10	82.20
71	(2-3/4")	66.60	93.20	66.60	139.85	99.90
76	(3")	76.50	107.10	76.50	160.65	114.75
83	(3-1/4")	89.60	125.50	89.60	188.20	134.46
89	(3-1/2")	101.00	141.40	101.00	212.10	151.50
103	(4")	129.00	180.60	129.00	270.90	193.50