
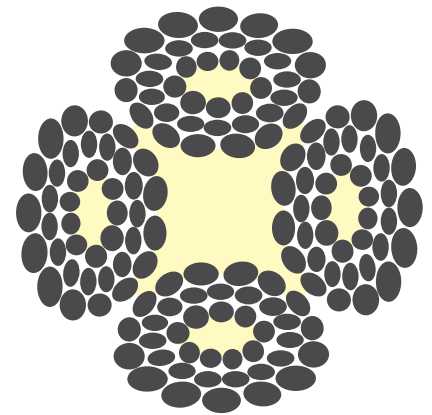
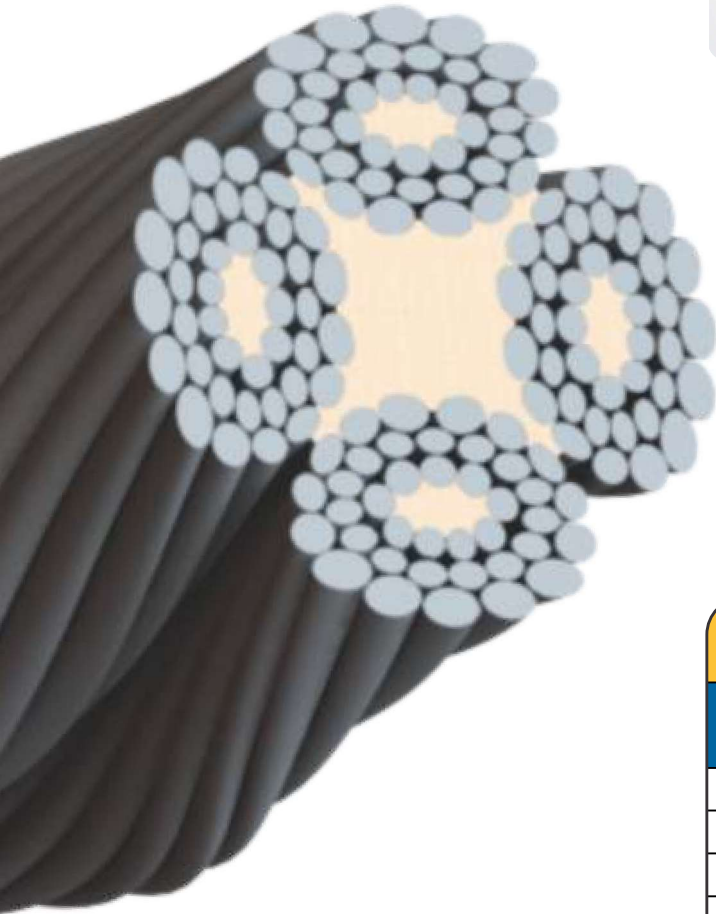


INDIROPE - 4x39 (15-15/9) + FC - Swaged

TYPICAL APPLICATIONS

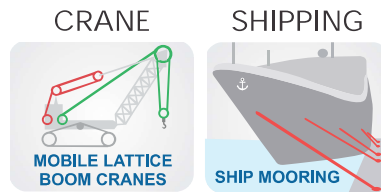

Breaking Load

Nominal Diameter	Approximate Mass	Minimum Breaking Force	
		IP/1770 grade	EIP/1960 grade
mm	Kg/100m	kN	kN
10	40.2	64	69
12	57.9	89	100
14	78.8	126	136
16	103	164	177
18	130	207	224
19	145	231	251
20	161	256	277
22	195	310	336
24	232	369	385
25	251	399	432
26	272	431	467
28	315	502	544
30	362	576	624
32	412	655	709
33.5	451	718	778
34	465	740	801
36	521	830	898
38	580	924	1001
40	643	1000	1079

NOTE:- Rope sizes not shown in the table may be available and details can be furnished on query/request.

Details of Wire Rope

1 SPECIFICATIONS (USP)

- Good Abrasion Resistance
- High Flexibility
- Rotation Resistance
- High Breaking Strength
- Swaged Rope



2 FINISH

- Galvanized
- Ungalvanized



3 AVAILABLE IN

- RHO (Right hand ordinary lay)
- LHO (Left hand ordinary lay)
- RHL (Right hand Langs lay)
- LHL (Left hand Langs lay)

