


TURNBUCKLE WITH JAW-JAW END FITTING

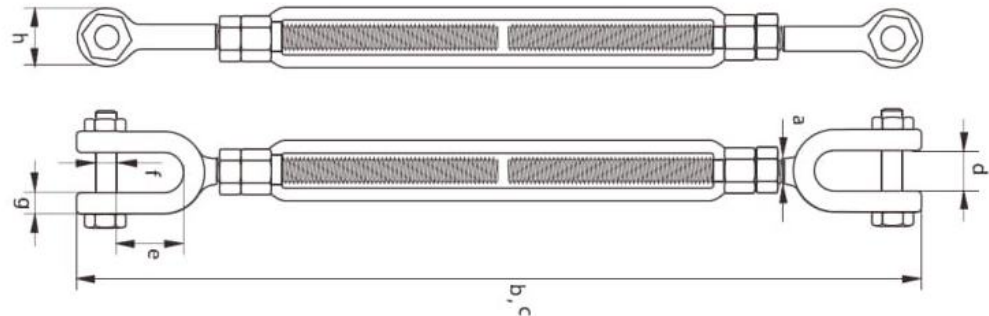

- Material** : Drop forged high tensile steel
Finish : Hot dip galvanized
WILL : Genrally to ASTM F1145-92
Packing : MBL=2xWLL | Proff load=2,5xWLL

Size	WLL t	Weight kg	Dimensions (mm)				
			a	b	c	d	e
1/4 x 4"	0.23	0.16	6.35	302.26	200.66	11.43	15.75
5/16 x 11/2"	0.36	0.24	7.874	353.06	238.76	12.7	22.1
3/8 x 6"	0.54	0.37	9.652	441.45	289.05	13.72	22.1
1/2 x 6"	1	0.71	12.7	508	330.2	13.97	26.92
1/2 x 9"	1	0.79	12.7	660.4	406.4	13.97	26.92
1/2 x 12"	1	1.09	12.7	812.8	482.6	13.97	26.92
5/8 x 6"	1.59	1.23	16.002	562.1	377.95	20.83	33.27
5/8 x 9"	1.59	1.56	16.002	714.5	454.15	20.83	33.27
5/8 x 12"	1.59	1.77	15.002	866.9	539.35	20.83	33.27
3/4 x 6"	2.36	1.86	19.05	612.14	421.64	26.16	38.1
3/4 x 9"	2.36	2.48	19.05	764.54	497.84	26.16	38.1
3/4 x 12"	2.36	2.92	19.05	916.94	574.04	26.16	38.1
3/4 x 18"	2.36	3.66	19.05	1,221.74	726.44	26.16	38.1
7/8 x 12"	3.27	3.71	22.352	966.98	617.73	31.24	44.45
7/8 x 18"	3.27	4.89	22.352	1,271.78	770.13	31.24	44.45
1x 6"	4.54	4.62	25.4	712.72	509.52	33.27	52.32
1x 12"	4.54	5.68	25.4	1,017.52	661.92	33.27	52.32
1x 18"	4.54	6.87	25.4	1,322.32	814.32	33.27	52.32
1X 24"	4.54	8.2	25.4	1,627.12	966.72	33.27	52.32
1 1/4 x 12"	6.89	9.34	31.75	1,118.62	750.32	47.24	71.37
1 1/4 x 18"	6.89	11.19	31.75	1,423.42	902.72	47.24	71.37
1 1/4 x 24"	6.89	12.79	31.75	1,728.22	1,055.12	47.24	71.37
1 1/2 x 12"	9.71	13.92	38.1	1,118.11	800.1	57.15	71.37
1 1/2 x 18"	9.71	16.67	38.1	1,485.9	952.5	57.15	71.37
1 1/2 x 24"	9.71	18.45	38.1	1,790.7	1,104.9	57.15	71.37
1 3/4 x 18"	12.7	24.49	44.45	1,503.17	1,045.97	66.04	85.85
1 3/4 x 24"	12.7	28.74	44.45	1,807.97	1,198.37	66.04	85.85
2 x 24"	16.78	42.75	50.8	1,948.69	1,339.09	66.55	93.73
2 1/2 x 24"	27.22	74.84	63.5	2,087.37	1,471.77	77-72	112.78
2 3/4 x 24"	34.02	89.81	69.85	2,171.7	1,562.1	93.47	106.43