

LEVER HOIST

Lever Hoist- LMLH



- Load from 0.25 to 9 Tons
- The LMLH manual lever hoist is a compact unit
- For lifting, pulling and sliding. Especially suitable for industrial use

TECHNICAL FEATURES

- Choice of rust, compact, lightweight, easy handling units
- Standard chain lengths 1.5 mtrs and Non-standard chain length available on request.
- LMLH can be used in any position, simply switch the lever to make the hoist easier to handle.
- LMLH comes with asbestos Free Friction Disc
- LMLH comes with Automatic double pawl braking system
- Reinforced casing effectively protects mechanisms
- High resistance industrial powder coating meets ROHS requirement
- Extra safe, light weight and low maintenance
- High strength GR 80 alloy load chain with black finish
- 1500 cycle life test meets ANSI B30-21, AS1418 standards
- Factor of safety-4:1
- Proof Load- 1.5WLL



Lever Hoist- LMLH

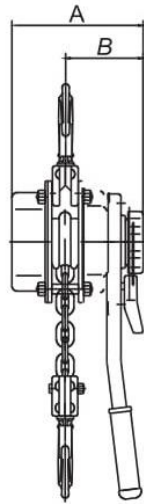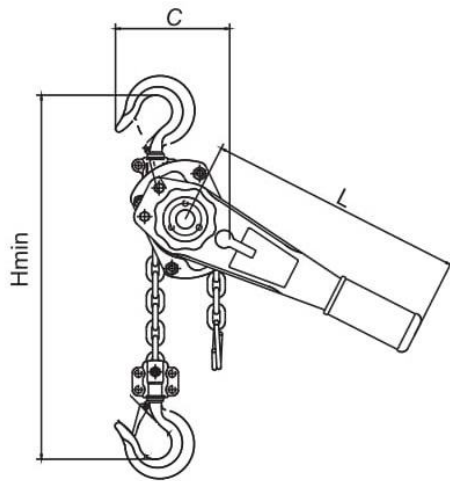

LEVER HOIST SPECIFICATIONS

Model No	Capacity (Kg)	Standard Lift(m)	Running Test Load (KN)	Effort Required to Lift (N)	Dia of Load Chain (mm)	No of Falls	Dimension					Net Weight	Extra Weight Per Meter of extra lift (KG)
							A	B	C	H	L		
LMLH-0.25	0.25	1	3.75	250	4	1	92	72	85	230	160	1.8	0.41
LMCB-0.5	0.5	1.5	7.5	340	5	1	105	78	80	260	300	4	0.52
LMLH-0.75	0.75	1.5	11.2	140	6	1	153	86	130	295	315	7.5	0.8
LMLH-01	1	1.5	15	185	6	1	153	96	130	295	315	7.5	0.8
LMLH-1.5	1.5	1.5	22.5	230	7.1	1	166	100	150	335	365	9.5	1.1
LMLH-02	2	1.5	30	251	8	1	175	105	160	385	368	15.5	1.4
LMLH-03	3	1.5	45	385	10	1	195	112	202	450	365	16.5	2.2
LMLH-06	6	1.5	75	385	10	2	195	112	242	550	365	27	4.4
LMLH-09	9	1.5	135	390	10	3	195	112	312	660	365	40	6.6