


TURNBUCKLE WITH HOOK-HOOK END FITTING

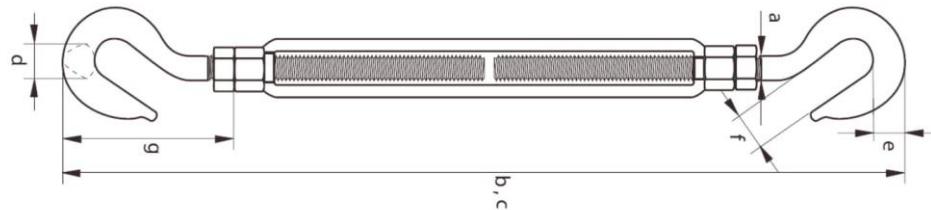

Material : Drop forged high tensile steel
Finish : Hot dip galvanized
WILL : Genrally to ASTM F1145-92
Packing : MBL=2xWLL | Proff load=2,5xWLL

Size	WLL t	Weig ht kg	Dimensions (mm)					
			a	b	c	e	f	g
1/4 x 4"	0.18	0.14	6.35	303.28	201.68	10.41	11.43	40.39
5/16 x 11/2"	0.32	0.21	7.87	350.77	236.47	12.7	12.7	49.28
3/8 x 6"	0.45	0.35	9.65	450.09	297.69	15.49	14.22	58.42
1/2 x 6"	0.68	0.73	12.7	517.65	339.85	19.81	16.76	74.68
1/2 x 9"	0.68	0.83	12.7	670.05	416.05	19.81	16.76	74.68
1/2 x 12"	0.68	1.03	12.7	822.45	492.25	19.81	16.76	74.68
5/8 x 6"	1.02	1.25	16	571.5	387.35	25.4	22.86	93.73
5/8 x 9"	1.02	1.53	16	723.9	463.55	25.4	22.86	93.73
5/8 x 12"	1.02	1.59	16	876.3	539.75	25.4	22.86	93.73
3/4 x 6"	1.36	1.76	19.05	629.41	438.91	30.48	24.89	114.81
3/4 x 9"	1.36	2.4	19.05	781.81	515.11	30.48	24.89	114.81
3/4 x 12"	1.36	2.46	19.05	934.21	591.31	30.48	24.89	114.81
3/4 x 18"	1.36	3.68	19.05	1,239.01	734.71	30.48	24.89	114.81
7/8 x 12"	1.81	3.67	22.35	984.25	635	34.93	28.7	131.83
7/8 x 18"	1.81	4.51	22.35	1,289.05	787.4	34.93	28.7	131.83
1x 6"	2.27	4.23	25.4	728.73	525.53	38.86	31.75	148.34
1X 12"	2.27	5.41	25.4	1,033.53	677.93	38.86	31.75	148.34
1X 18"	2.27	6.35	25.4	1a38.33	830.33	38.86	31.75	148.34
1X 24"	2.27	7.82	25.4	1,643.13	982.73	38.86	31.75	148.34
11/4 x 12"	2.95	9.34	31.75	1,119.12	750.82	45.97	38.1	183.39
11/4 x 18"	2.95	10.43	31.75	1,423.92	903.22	45.97	38.1	183.39
11/4 x 24"	2.95	12.25	31.75	1,728.72	1,055.62	45.97	38.1	183.39
11/2 x 12"	3.4	12.47	38.1	1,204.98	823.98	44.45	47.75	211.84
11/2 x 18"	3.4	14.06	38.1	1,509.78	976.38	44.2	47.75	211.84
11/2 x 24"	3.4	17.01	38.1	1,814.58	1,128.78	44.45	47.75	211.84